


BookTEK® 5

A2+ Book Scanner

The BookTEK Archive with high-performance motorized glass plate

V2 Archive Automatic

Next Generation!

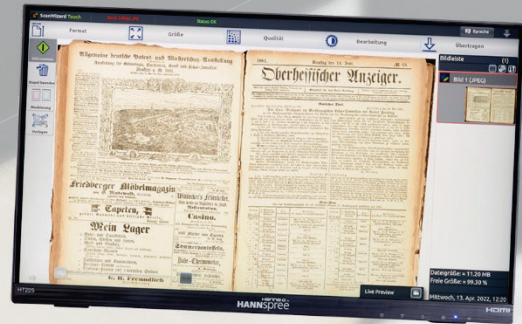


Most versatile 600 dpi archival scanner
Self-aligning book cradle with an
ergonomic motorized glass plate



© 03_2026 / EN



- OVERHEAD BOOK SCANNER
DIN/ISO A2+14%
- FADGI, ISO 19264
COMPLIANT
- 600 x 600 DPI SCANNER
RESOLUTION
- TRUE SCAN TECHNOLOGY,
NOT A DIGICAM SUBSTITUTE
- 0.9 SEC FOR A2+ SCAN
@150 DPI
- SELF-ALIGNING BOOK
CRADLE WITH MOTORIZED
LIFT
- SCANNING IN
V-MODE (120°)
AND FLAT MODE (180°)
- V-SHAPED GLASS PLATE
FOR PERFECT SCANS
- OPTIONAL FLAT GLASS
PLATE
- LASER ASSISTED BOOK
FOLD CORRECTION
- DIGITAL COLOR BALANCE
- INTEGRATED ICC PROFILE
- INTEGRATED 64BIT LINUX,
INTEL CORE I3 GEN.8 240GB
SSD, 8GB RAM
- 2,5 GIGABIT TCP/IP
NETWORK INTERFACE
- SUPPORTS SRGB, ADOBE
RGB, NATIVE COLOR
SPACES
- VIRUS RESISTANT LINUX
OPERATING SYSTEM
- EXCELLENT ENERGY
EFFICIENCY, CEC LEVEL VI
- 2 x USB 3.0 PORTS
ACCESSIBLE ON FRONT
PANEL
- EASY INSTALLATION VIA
SCAN2NET® TECHNOLOGY

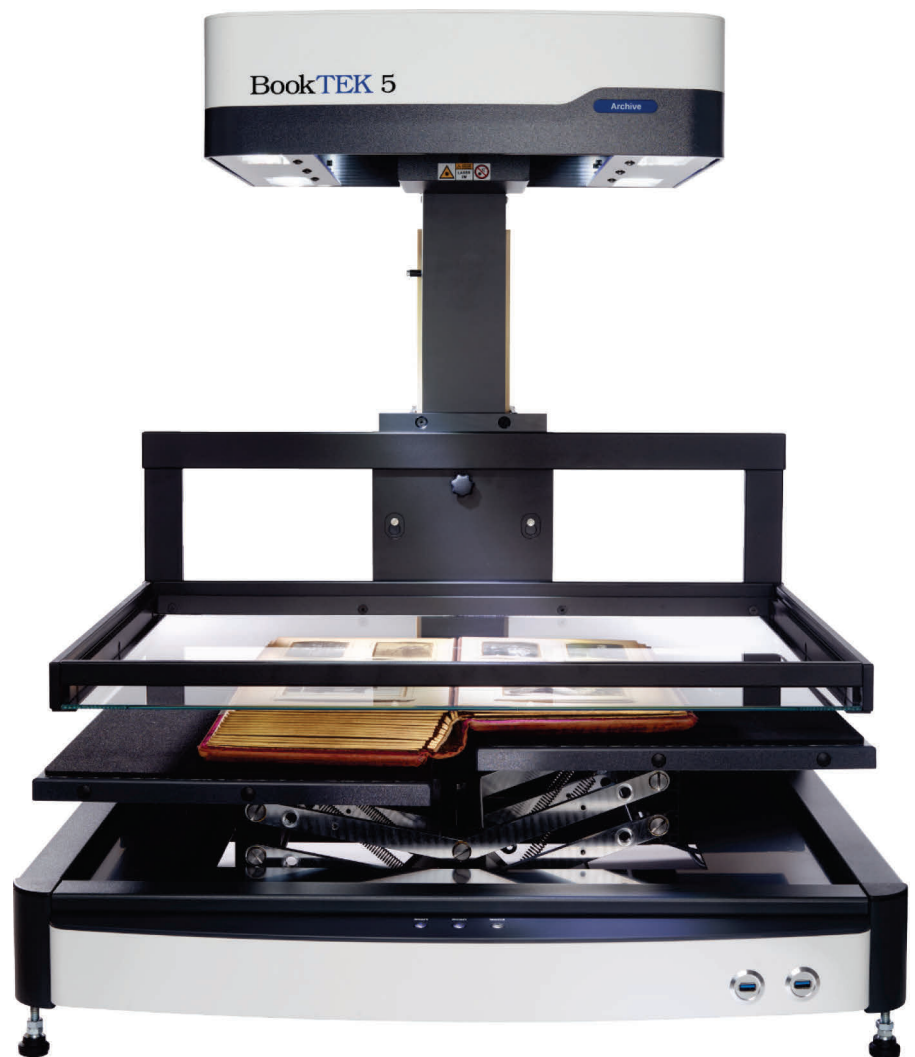

Easy to use, maximum productivity

The BookTEK® 5 V2 Archive Automatic book scanner is ideal as a production system for all demanding digitization projects.

A motorized lift with a V-shaped glass plate on a self-aligning book cradle, along with an optional flat glass plate, ensures extremely ergonomic operation.

Using the latest camera technology from Image Access, this scanner meets FADGI and ISO 19264 specifications.

PRODUCTIVITY MEETS QUALITY IN DIGITIZATION!

The Production System for Digitization Projects

Highlights: Self-adjusting book support with V-shaped glass plate and optional flat glass plate

BookTEK® 5 V2 Archive-Automatic is ideal for digitization projects that require high quality and maximum productivity, even during 24/7 operation. Originals up to A2+ size, such as books, magazines, posters, portfolios, or bound documents of all kinds, can be digitized with the BookTEK® 5 V2 at high speed and a resolution of up to 600 dpi.

The unique, self-adjusting book holder allows scanning either at a 120-degree angle or in horizontal mode, as well as flat with a 10 cm height adjustment function.

Glass plate solutions


The book cradle ensures perfect scans while protecting the spine. The V-shaped glass plate can be removed in just a few simple steps. Depending on your needs, the BookTEK® 5 V2 Archive Automatic can now be used with an optional flat glass plate or without a glass plate at all.



Scanning newspapers up to A2 with flat glass plate.

Key features that make the BookTEK® 5 V2 Archive the right choice for any application

- Large 21" full HD color multitouch screen for simplified operation, 2nd preview screen is optional
- Live Preview
- Self-adjusting book cradle 120 - 180 degrees can lift 10 cm
- V-shaped glass plate for perfect scans, optional flat glass plate is available
- Motorized glass plate for ergonomic handling
- Output formats: PDF, PDF/A, JPEG, TIFF, PNM, multipage PDF and TIFF, DICOM and many more
- OS independent, runs with Windows, Linux, Mac
- Digital color balance, wide color gamut, supports sRGB, Adobe RGB, native RGB
- FADGI and ISO 19264 compliant.
- ScanWizard runs through any browser via network
- Remote maintenance, troubleshooting and firmware updates
- Full Coverage Warranty – Up to 5 years, free spare parts & consumables

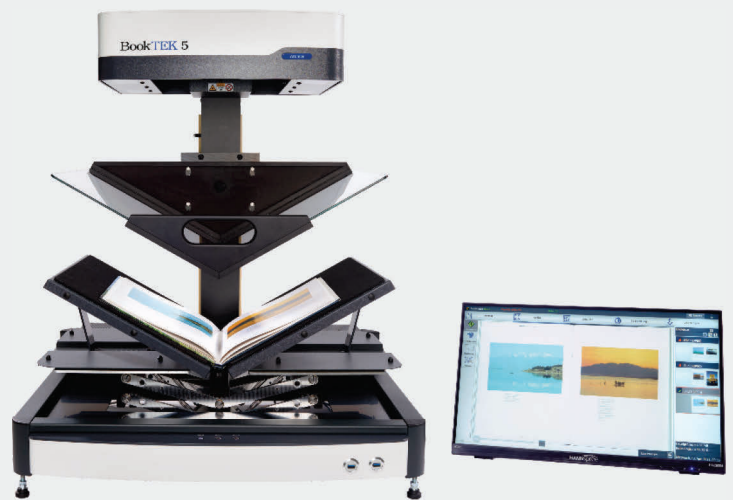

Scanning highly glossy originals with V-shaped glass plate.

BookTEK® 5 Archive Automatic Markets

- Libraries, Archives
- Service Providers
- Government and private commercial organizations
- Universities
- Information Facilities
- Research Facilities

BookTEK® 5 Archive Automatic Applications

- Digitizing books and bound documents
- Digitizing files from file folders
- Digitizing stapled documents like contracts, account ledgers and documentation
- Preserving books and sensitive historical documents
- Scan fragile material, such as damaged, brittle, wavy, or fragile books.

What's in the Box?

- Base unit with book cradle and glass plate
- Motorized glass plate for ergonomic operation
- 21" full HD, 1920 × 1080p resolution touch screen
- Power supply for scanner and 21" screen including power cords
- Foot switch
- Test and calibration targets
- One year of Full Coverage Warranty
- Suitable for mobile applications
- Easy installation (ready to use in under 1 hour)

Options


- **BE5-V2-GLAS-FLAT** Flat Glass Plate
- **BSW-6-BE5-A2** Batch Scan Wizard 6 License
- **SCAN2OCR** Background OCR on scanner
- **BE5-V2-A-SP12M** One year additional Full Coverage Warranty
-

Scan2Net® Advantages

- 64 bit Linux based computer, fast and virus protected
- Routable, easy integration into existing network structures
- Scans directly to SMB, FTP, hot folders, Email or the Cloud
- Simple, intuitive operation via full HD touchscreen

TECHNICAL DATA

Maximum Scan Area	460 x 620 mm (18 x 24 inch), 14% more than DIN/ISO A2
Scanner Resolution	600 x 600 dpi
Scan Speed	DIN A2+ @ 150 dpi: 0.9 s, @ 200 dpi: 1.1 s, @ 300 dpi: 1.6 s, @ 400 dpi: 2.0 s, @ 600 dpi: 3.0 s
Color Depth	48 bit color, 16 bit grayscale
Scan Output	24 bit color, 8 bit grayscale, bitonal, enhanced halftone
File Formats	Multipage PDF (PDF/A) and TIFF, JPEG, JPEG 2000, PNM, PNG, BMP, TIFF (Raw, G3, G4, LZW, JPEG), AutoCAD DWF, JBIG, DjVu, DICOM, PCX, Postscript, EPS, raw data and more
ICC Profiles	Embedded for sRGB, Adobe RGB and native. Individual profiling via web based Scan2ICC subscription
Quality	Complies to FADGI *** guidelines, ISO 19264 Level B
Camera	CCD line sensor
Light Source	White LEDs, tested according to IEC 62471, no IR/UV emission
Lamp Life Time	50,000 h typ. Lamps are covered by the Extended Warranty Option
Computer	64 bit Linux, Intel® Core™ i3 generation 8 processor, 240GB SSD, 8 GB memory for extra large jobs
Touchscreen	21" full HD 1920 * 1080 multitouch screen
USB Port	2 x USB 3.0 port in the front, 4 x USB 2.0 port in the back
Interface	2,5 GBit fast Ethernet with TCP/IP based Scan2Net® interface
Dimension / Weight	H x W x D: 870 x 730 x 670 mm (35 x 29 x 26 inch) / 53 kg (117 lbs.)
Electrical Specification	100-240 V AC, 47 - 63 Hz (external power supply, complies with ECO standard CEC level VI)
Power Consumption	P _(Off) 0.3W / P _(Sleep) 4.6W / P _(Ready) 40W / P _(Active) 110W (43% below ENERGY STAR requirements)
Green IT	Consumes 30% less energy than previous models
Environment	Operating temperature 5 to 40 °C, relative humidity 20 to 80% (non-condensing)
Noise	< 42 dB(A) (Scanning) / < 33 dB(A) (Standby)
Approvals	IEC/EN 62368-1:2020 Ed.3, AUS/NZL 62368-1:2019 Ed.3 UL 62368-1:2019 Ed.3, CSA 22.2#62368-1:2019 Ed.3, RoHS,



Visit our homepage!

IMAGE ACCESS GMBH

Hatzfelder Str. 161-163
42281 Wuppertal, Germany
Phone: +49 202 27058-0

www.imageaccess.de

IMAGE ACCESS LP

400 N. Belvedere Drive
Gallatin, TN 37066, USA
Phone: +1 (615) 675-4141

www.imageaccess.us

Technical changes, errors and omissions excepted.
All information subject to change.. © Image Access GmbH 2026